### **FOOTBALL SCOREBOARD CONTROLLER**



# SKL – FPC – V3

#### **GENERAL FEATURES**

0

 $\bigcirc$ 

- It is used in management of football matches.
- It is charged full between 1 to 1.5 hours.
- It can record the match with game statistics.
- It can send animations of player and referee names to the scoreboard.
- It can send message to the scoreboard.
- It can send red card, yellow card and goal animations to the scoreboard.
- The game can be started or finished at any time.
- It can work wired or wireless.



TECHNICAL PARAMETERS		
Height	185 mm	
Width	300 mm	
Thickness	70 mm	
Weight	2 kg	
Average Power Consumption	5.5 W	
Maximum Power Consumption	16 W	
Operating Voltage	10.8 – 16.8V	
Operating Temperature	(-40°C) – (+55°C)	
Protection Class	IP54	
Type Of Material	Al	
Guarantee Duration	2 years	
Frame Color	Gray	

## **ASTROTURF SCOREBOARD CONTROLLER**



# SKL – AFC – V1

#### **GENERAL FEATURES**

• It is used at the management of football and astroturf matches.

0

 $\bigcirc$ 

- The game time can be adjusted.
- The time of day can be shown on the scoreboard.
- The charging status can be monitored instantly.
- It is charged full between 1 and 1.5 hours.
- RF channel setting is made.



TECHNICAL PARAMETERS		
Height	39 mm	
Width	145 mm	
Thickness	85 mm	
Weight	0.35 kg	
Average Power Consumption	0.3 W	
Maximum Power Consumption	0.5 W	
Operating Voltage	8.4V	
Operating Temperature	(-40°C) – (+55°C)	
Discharge Duration	4 days	
Protection Class	IP54	
Guarantee Duration	2 years	
Frame Color	Mat Black	

## **ASTROTURF SCOREBOARD CONTROLLER**




## SKL – ASC – V1

### **GENERAL FEATURES**

0

 $\bigcirc$ 

- It is used at the management of astroturf matches.
- It has ability to reset the game and change the scores.
- It gets its energy from the scoreboard.

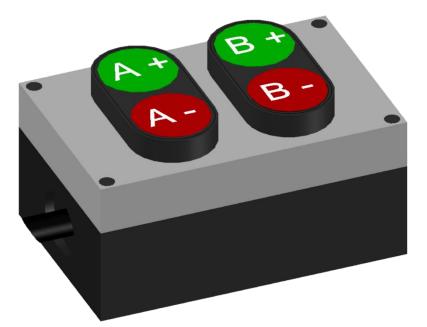

TECHNICAL PARAMETERS		
Height	62 mm	
Width	100 mm	
Thickness	68 mm	
Weight	0.25 kg	
Operating Temperature	(-40°C) – (+55°C)	
Protection Class	IP65	
Guarantee Duration	2 years	
Frame Color	Mat Black	